



Hypertherm®

POWERMAX® 45


Shielded configuration

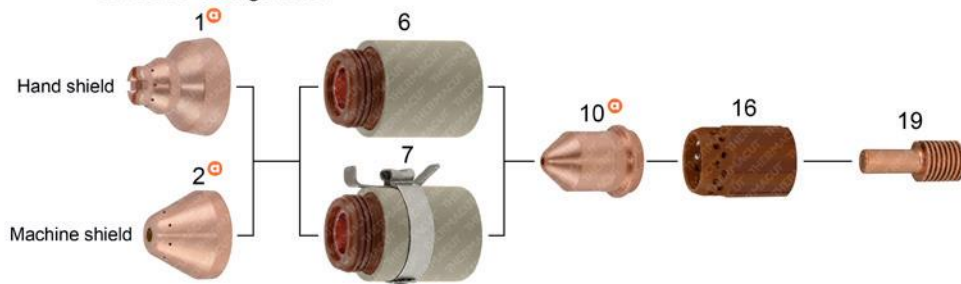


NonShielded configuration

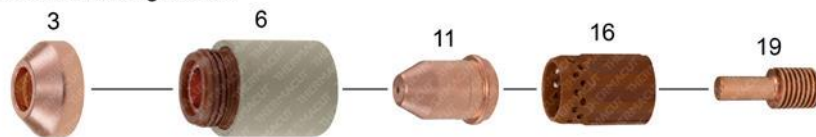

Gouging configuration

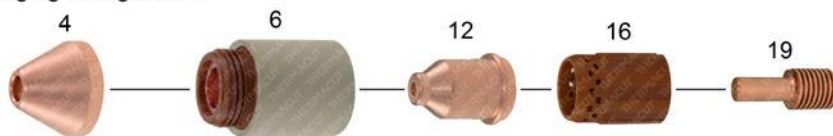

T30v™ configuration

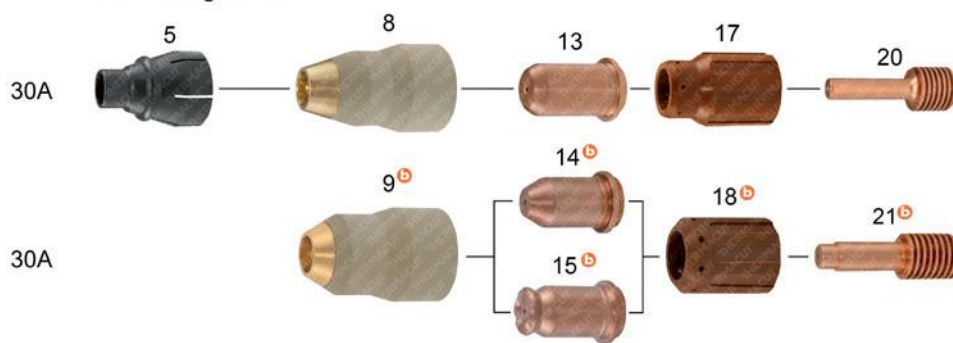

Item	Part No.	Ref. No.	Description	Std. Pkg.	Item	Part No.	Ref. No.	Description	Std. Pkg.
1	T-11393	220674-UR	Shield - hand cutting	1	12	T-11394	220672	Nozzle-Gouging	5
2	T-11398	220673-UR	Shield - machine cutting	1	13	T-11234	220480	Nozzle 30A	5
3	T-11213	220717	Deflector	1	14	T-11849	220480-UR	Nozzle	5
4	T-11392	220675	Shield-Gouging	1	15	T-11943	220480-D	Nozzle Drag	5
5	T-10777	220569 OEM	Deflector (optional)	1	16	T-11212	220670	Swirl Ring 45A	1
6	T-12074	220713	Retaining Cap 45A (without IHS tab)	1	17	T-11235	220479	Swirl Ring 30A	1
7	T-12075	220719	Retaining Cap 45A (with IHS tab)	1	18	T-11848	220479-UR	Swirl Ring	2
8	T-11279	220483	Retaining Cap 30A	1	19	T-11236	220669	Electrode 45A	5
9	T-11852	220483-UR	Retaining Cap	1	20	T-10758	220478 OEM	Electrode 30A	5
10	T-11395	220671-UR	Nozzle-Shielded	5	21	T-11850	220478-UR	Electrode	5
11	T-11214	220718	Nozzle-NonShielded	5					

- ⓐ MUST BE USED ONLY AS A SET OF SHIELD AND NOZZLE, THIS COMPLETE SET IS INTERCHANGEABLE AND COMPATIBLE WITH ORIGINAL PARTS
- ⓑ MUST BE USED ONLY AS A SET OF RETAINING CAP, NOZZLE, SWIRL RING, ELECTRODE, THIS COMPLETE SET IS COMPATIBLE WITH ORIGINAL TORCH BODY